


STACKING S 180 H MLR - INDOOR

David Rockwell, 2025

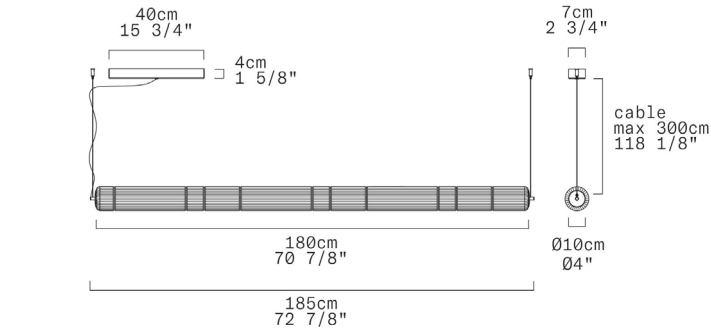

REPLACEABLE LED


| TECHNICAL SHEET  |                                                                                                                                  |
|------------------|----------------------------------------------------------------------------------------------------------------------------------|
| MATERIALS        | Diffuser: Millerighe Borosilicate Glass<br>Structure: Aluminum                                                                   |
| DIMENSIONS       | Diffuser: [Ø4" 70 7/8"] Ø10cm L180cm<br>Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm<br>Cable lenght: [118 1/8"] 300cm |
| CANOPY           | Matte white                                                                                                                      |
| LIGHT SOURCE     | 5 X LED STRIP 43,75W (total) 3830 lm (delivered) 3000K CRI≥90<br>5 X LED STRIP 43,75W (total) 3536 lm (delivered) 2700K CRI≥90   |
| DIMMING PROTOCOL | 0/1-10V, Phase Cut                                                                                                               |
| MARKING          | DRY LOCATION                                  |
| NET WEIGHT       | 27 lbs                                                                                                                           |

|                |  |
|----------------|--|
| PROJECT NAME   |  |
| SPECIFIER NAME |  |

We reserve the right to change our product specifications.  
Please visit [www.leucos.com](http://www.leucos.com) for the latest product information

North America

LEUCOS

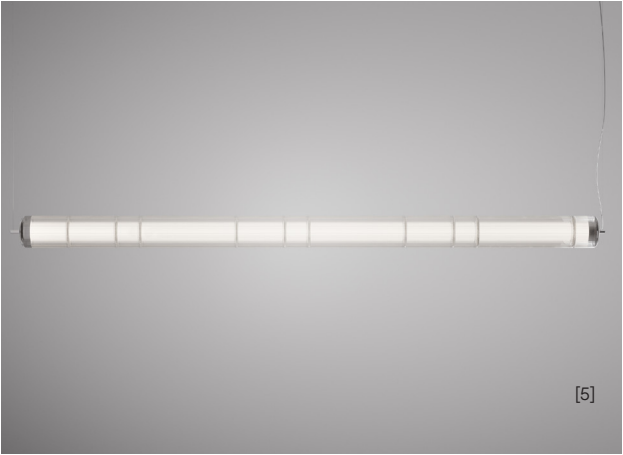

100-277Vac 50-60Hz standard version  
(supplied with canopy & driver)

|                                               |                        |                          |     |      |
|-----------------------------------------------|------------------------|--------------------------|-----|------|
| DIMMING PROTOCOL                              | 0/1-10V, Phase Cut     |                          |     |      |
| FINISH (DIFFUSER + STRUCTURE)                 | SOURCE                 | CODE                     | QTY | TYPE |
| [5] Trasparent Millerighe + Anodized Aluminum | LED 3000K<br>LED 2700K | 0014662<br>0014663       |     |      |
| [6] Trasparent Millerighe + Matte Black       | LED 3000K<br>LED 2700K | 0014664<br>0014665       |     |      |
| Amber Millerighe + Anodized Aluminium         | LED 3000K<br>LED 2700K | 0014662/MA<br>0014663/MA |     |      |
| Amber Rigadin + Matte Black                   | LED 3000K<br>LED 2700K | 0014664/MA<br>0014665/MA |     |      |